

MSI DIGIVOX Duo Installation Manual

Contents

V1.0

Chapter 1 : MSI DIGIVOX Duo Hardware Installation	2
1.1 Package Contents	2
1.2 System Requirements.....	2
1.3 Hardware Installation	2
Chapter 2 : MSI DIGIVOX Duo Installation.....	3
2.1 The Driver Installation of MSI DIGIVOX Duo.....	3
2.2 TotalMedia Application Installation of MSI DIGIVOX Duo	4
2.3 The Remote Control Installation of MSI DIGIVOX Duo	6
Chapter 3 : Uninstallation of MSI DIGIVOX Duo	7
3.1 The Driver Uninstallation of MSI DIGIVOX Duo	8
3.2 The Utilities Uninstallation of MSI DIGIVOX Duo	8
3.3 TotalMedia Application Uninstallation of MSI DIGIVOX Duo.....	8
Chapter 4 : FAQ	9
4.1 How to check if the driver has been installed successfully or not?	9
Chapter 5 :Remote Functions.....	10
Chapter 6 : Use the TotalMedia at the First Time	11
Chapter 7 : TV Function in TotalMedia	13
Chapter 8 : PIP / PBP Mode in TV Function	24

Chapter 1 : MSI DIGIVOX Duo Hardware Installation

1.1 Package Contents

Unpack your MSI DIGIVOX Duo package and make sure that all items are intact. The following items should be included in your package:

- MSI DIGIVOX Duo
- Software Package CD*
- Users Manual
- Quick Installation Guide
- Remote Controller
- DVB-T Antenna**
- USB Extension Cable

* Includes MAGIX Goya Base software. Goya Base is XP, MCE 2005 and Vista compatible. Some functions are unavailable; please upgrade to MAGIX Goya Multimedia for more functions.

**The included antenna is only suitable for areas with a strong DVB-T signal. If you have reception problems, first try to move or reorient the antenna. Otherwise, you may need to use a stronger antenna for better reception.


1.2 System Requirements

- Pentium-IV 2.0GHz or above
- 512MB RAM of system memory or above
- One available USB 2.0 port
- Graphics Card (Must Support Microsoft DirectX® 9.0)
- Sound Card (AC97 Compatible Sound Card)
- 2GB Free HD Space
- CD-ROM or DVD-ROM Drive (For software installation)
- Microsoft DirectX® 9.0
- Microsoft Windows ® XP SP2 / XP MCE 2005/ Vista Premium above (when using MCE 2005 OS, an extra 3rd party DVD decoder must be installed)

1.3 Hardware Installation

Please follow the steps shown below for installation of your MSI DIGIVOX Duo and follow the pictorial guide below for peripheral connections.

1. Connect the DVB-T antenna into the TV INPUT connector.
2. Plug MSI DIGIVOX Duo into the USB 2.0 port of your system

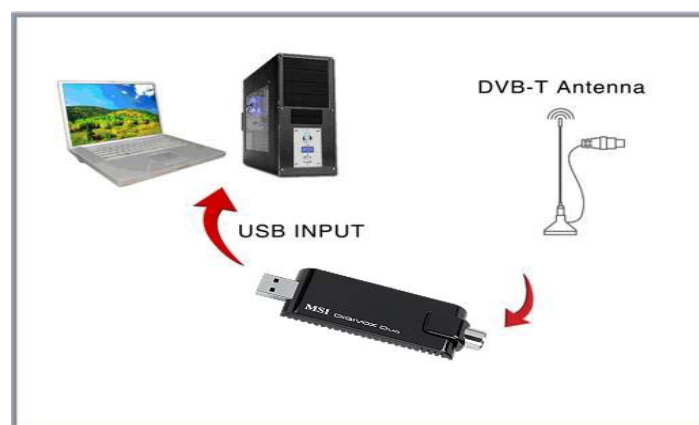

Chapter 2 : MSI DIGIVOX Duo Installation

The MSI DIGIVOX Duo package comes with complete Windows software utilities. These utilities can be found on the CD-ROM in this package. During installation, it is highly recommended to disable any sub-programs. These include applications such as antivirus software and system monitoring applications.



When you finish the hardware setup. The “Found New Hardware Wizard” window will pop up. Please click **“Cancel”**.

2.1 The Driver Installation of DIGIVOX Duo



1. Insert the installation CD into the CD ROM device. The autorun page will appear as the left image. Please choose **“Driver Installation”**

Note: Your USB device must be plugged in the USB2.0 port before installation.



2. Click **“Start”** to install the MSI DIGIVOX Duo driver. Please wait, while the installation is in process




3. Now the driver has been installed successfully on your computer and click **“OK”** to finish driver installation and go to next step.


2.2 TotalMedia Application Installation of MSI DIGIVOX Duo



1. Return to the autorun page, and choose “**TotalMedia Installation**”.

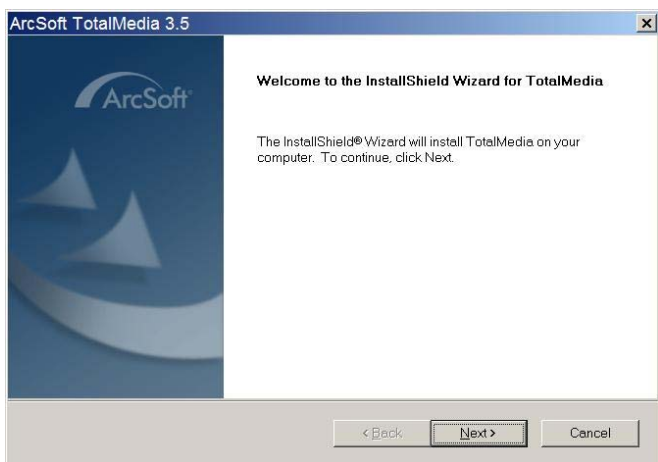


2. The InstallShield Wizard will guide you through installation of **TotalMedia** application. Click “**Next**” to continue.

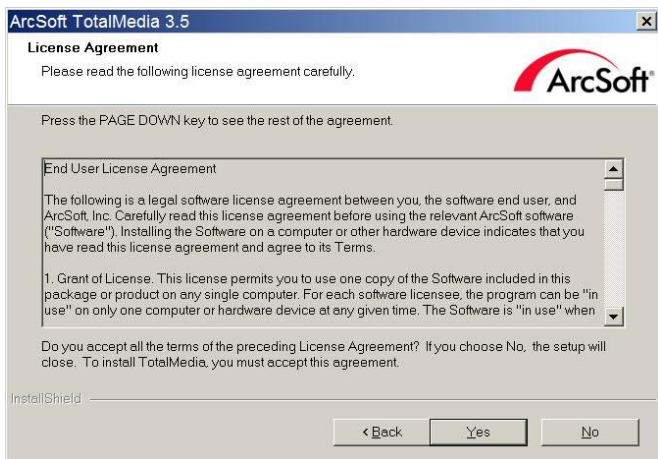

3. Click “**Yes**” accept all the terms of the proceeding License Agreement to install **TotalMedia**.



4. Please input user information and your **TotalMedia** serial number. Click “**Next**” to continue.

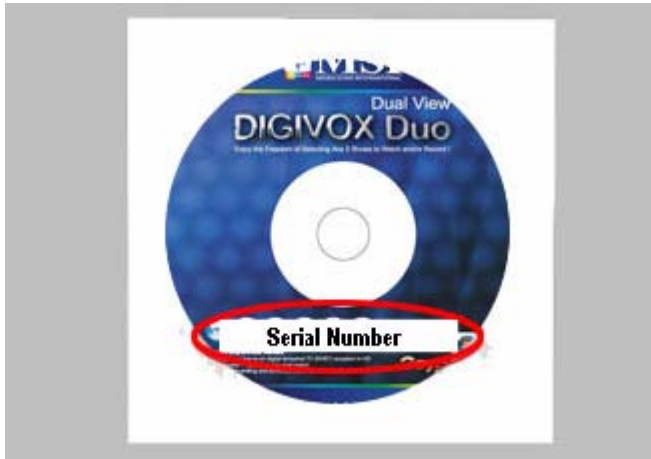


Note: While installing TotalMedia, it requires serial number. The serial number is printed on the front side of CD paper bag. Please check it from the CD bag.



5. Please choose the destination folder where you want to install the files. You can click “**Browse**” to change the destination folder. Finally click “**Next**” to go to next step.



6. Setup will add program icons to the Program Folder's list. You may type a new folder name, or select one from the existing folders list. Click “**Next**” to start installing. Please wait while installation in process.

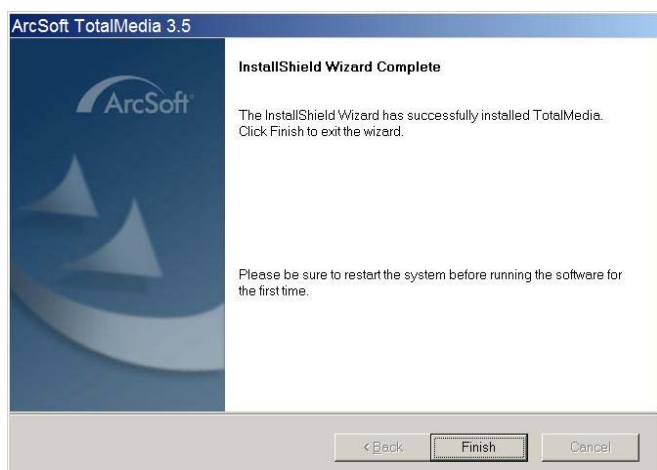


7. When the message as the one on the left image, click “**Finish**” to end the installation and go to next step.


2.3 The Remote Control Installation of MSI DIGIVOX Duo



1. Return to the autorun page, and choose ***“Remote Control Installation”***.

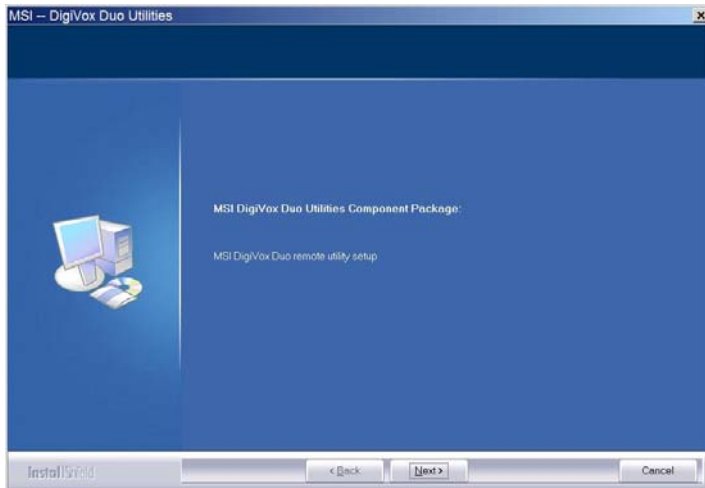

2. The InstallShield Wizard will guide you through installation of MSI DIGIVOX Duo remote utilities. Click ***“Next”*** to continue.

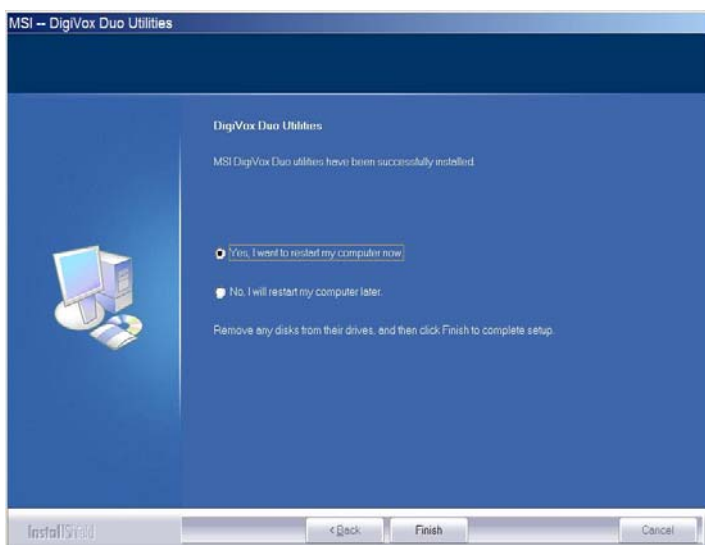


3. MSI DIGIVOX Duo utilities have been installed. Please click ***“Finish”*** to finish your installation.


Chapter 3 : Uninstallation of MSI DIGIVOX Duo

You can follow the steps to Uninstall.

(For Windows XP) **Start -> Settings -> Control Panel -> Add / Remove Program**

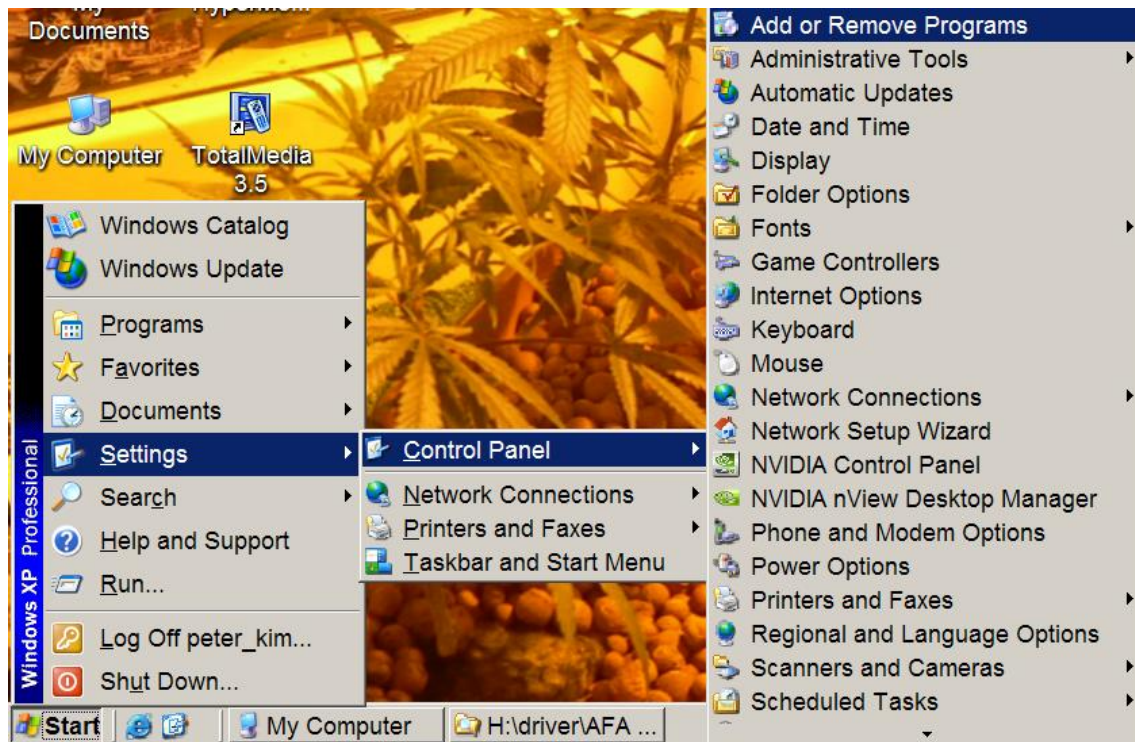


(For Windows Vista) **Start -> Settings -> Control Panel -> Programs and Features**

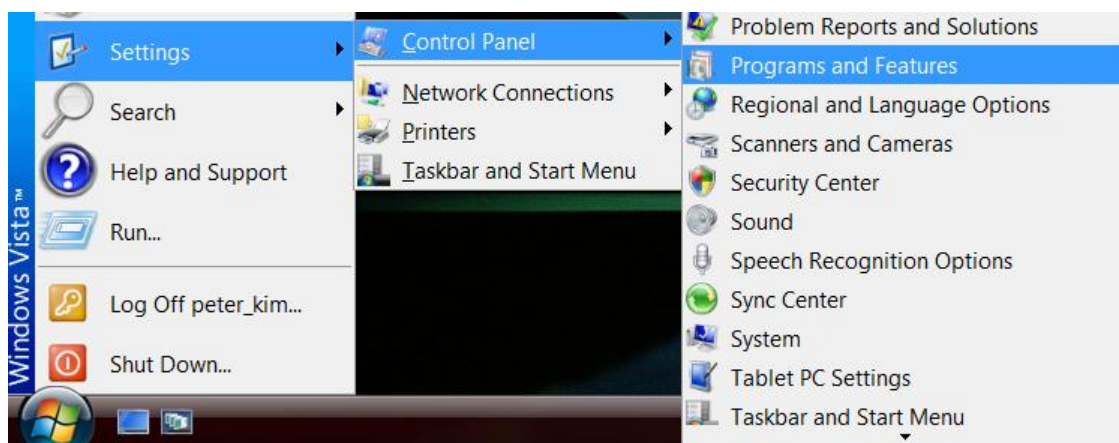

3.1 The Driver Uninstallation of MSI DIGIVOX Duo


Choose “**MSI DigiVox Duo BDA Driver**” and click the “**Remove**”. Follow the instruction on screen to complete the uninstallation.

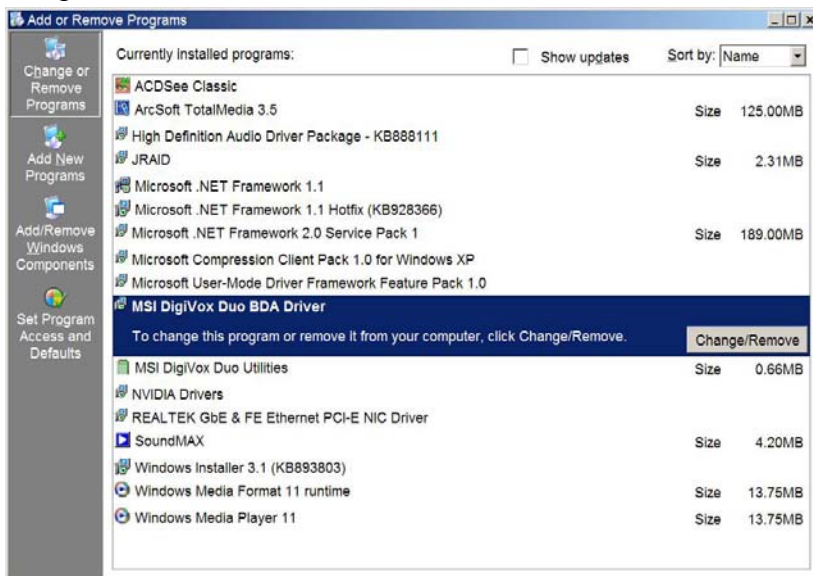

Note1: Your USB device must be plugged in the original USB2.0 port before uninstallation.


3.2 The Utilities Uninstallation of MSI DIGIVOX Duo

Choose “**MSI DigiVox Duo Utility**” and click the “**Remove**”. Follow the instruction on screen to complete the uninstallation.

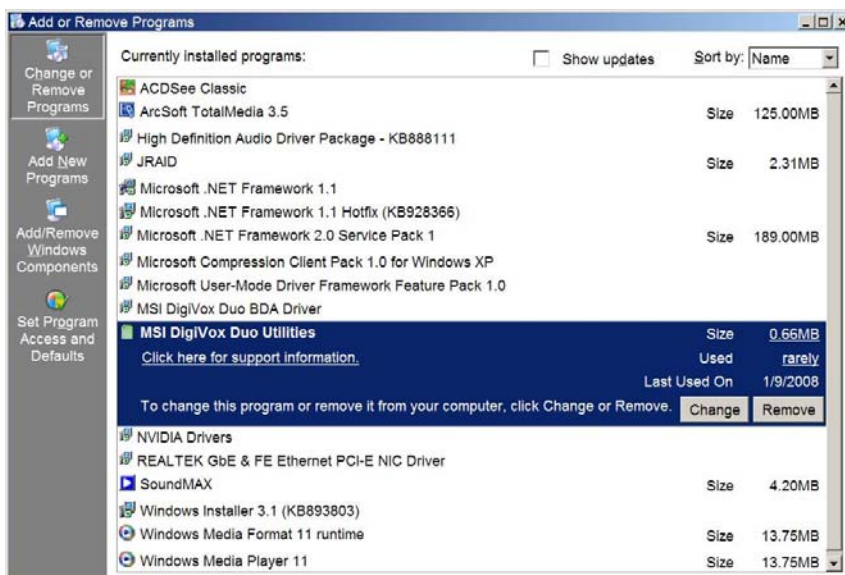

3.3 TotalMedia Application Uninstallation of MSI DIGIVOX Duo

Choose “**ArcSoft TotalMedia 3.5**” and click the “**Remove**”. Follow the instruction on screen to complete the uninstallation.

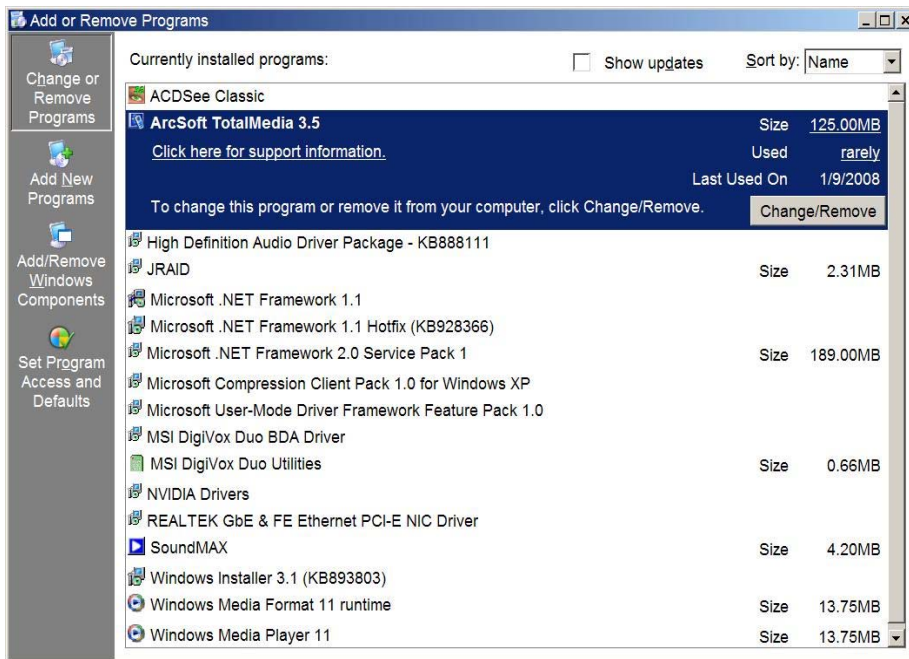

Chapter 4 : FAQ

4.1 How to check if the driver has been installed successfully or not?

Ans : Right click on “**My Computer**” on the desktop and choose “**Properties**”. Once in “Properties” window, click on “**Device Manager**” in **Hardware** panel. Click on the plus icon of “Sound, video and game controllers” to open the device list. See **Fig.1** below.



Fig.1

Chapter 5 :Remote Functions


 : Turns on /off the TotalMedia application.

Source : Change Source.

Zoom : Switch between full screen and windowed viewing modes.

Shut Down : Shut down the PC.

Please press 「」 button to turn off the “**TotalMedia**” and then press 「shut down」 button. After that, it will appear a warning-message window. Press 「」 button again to shut down.

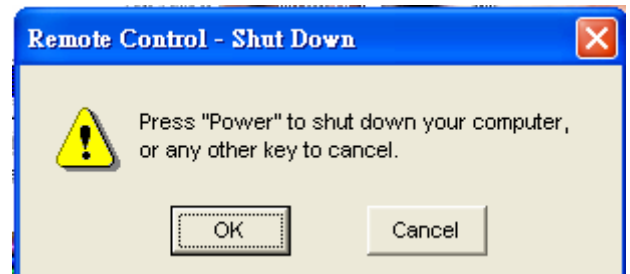

CH+/CH- : Switch to the next / previous channel.

VOL-/VOL+ : Decrease / increase the volume.

Numeric Keypad : Keypad for channel selection.

 : Switch to the previously selected channel.

 : Enter.

Rec : Record the current program.

Stop : Stop the playback or recording of the current program.

Play : Play the recorded file.

Mute : Turn on /off the Audio.

 : Menu_Up.

 : Menu_Down.

 : Menu_Left.

 : Menu_Right.

Return(Red key) : Return to the previous menu.

Snapshot (Green key) : Capture the on-screen image to a file.

TV (Yellow key) : Directly execute TV Function.

EPG (Blue key) : Reveal Electronic Programming Guide from internet.



*Remote Control only for Arcsoft Total Media Software

Chapter 6 : Use the TotalMedia at the First Time

Before you start to watch TV with TotalMedia, you have to follow the instructions to scan all available channels in your region.



1 Open the TotalMedia, and click “TV” to next step.




2 On the TV Signal Setting, please click “Next” to next step.



3 Please select your region and click “Next”




4 Select video device and click "Next" .You can select one of them and set the other after this step.

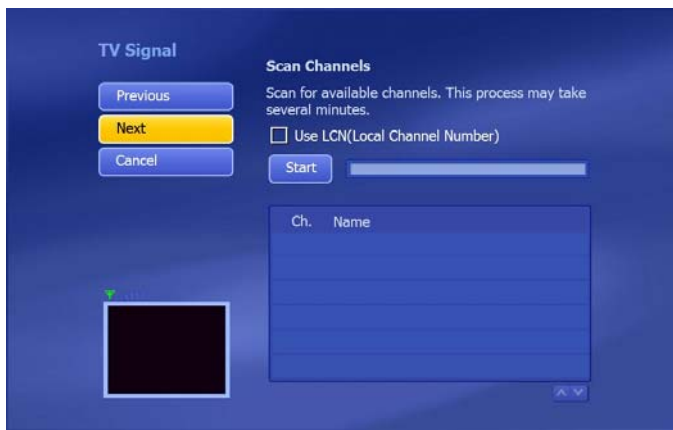

5 Click “Start” to scan Total Media channels. All scanned channels will be shown on channel list. When scan is completed, click “Next” to the next step.




When channels were found, please click ”OK” to continue.

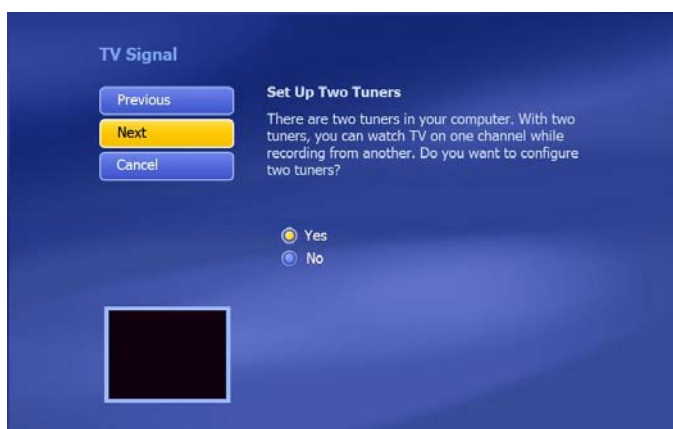

6 After setting up one tuner, Click “Yes” to setup the second tuner.



7 In Setting Digital EPG, please choose “NO” now, and Click “Next” to next step.

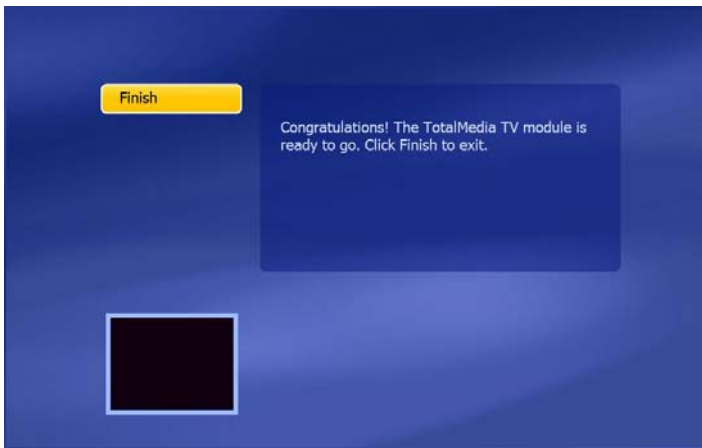

8 Click “Finish” to finish the Total Media channel scanning.



9 You can enjoy watching TV with TotalMedia now.

Chapter 7 : TV Function in TotalMedia

Welcome to ArcSoft TotalMedia, an all-in-one multimedia application that allows you to access and work with digital photos, home videos, recorded TV programs, radio and your digital music library right from your TV or home computer.



TotalMedia is divided into the main sections below.

Note that some versions of TotalMedia may not contain all the sections listed depending on the hardware configuration, and the specific version of TotalMedia installed.

FLOATING TOOLBAR

The floating toolbar appears for a few seconds whenever you move the mouse:



The "Home" button (it looks like a house) takes you to the program's startup screen. The arrow takes you to the previous screen.



The toolbar at the bottom of the screen features standard audio/video playback controls (Play/Pause, Stop, Record,) plus Volume and Channel controls. Special controls for MPEG2 playback and only appear when necessary.



When watching movie discs, video files, and recorded TV shows:

Use these buttons to adjust the playback speed at variable rates.



When watching MPEG-2 videos and recorded TV shows:

Use these buttons to skip forward by roughly 27 seconds, or backwards by roughly 27 seconds. These buttons are useful for bypassing commercials or skipping back slightly if you accidentally skip ahead too far.

When watching movie discs:

Use these buttons to skip to the next or previous chapter.

TV MODULE

This section lets you view and edit the settings for TV recording.



After configuration in Chapter 6 is completed, you can use your remote control to change channels, or use the channel controls (+/- button) in the floating toolbar at the bottom of the screen.

You may pause and rewind TV (while you're watching) using both the remote control and the toolbar.

Options include:

Full Screen - Displays the video over the entire program display area-typically the entire screen. You can

click the Full Screen button to switch into full screen mode. Press "Esc" or double-click the mouse to go back to a normal window.



Note: You should check the "Time Shift" option in TV Settings to display the time bar.

EPG -Display the electronic programming guide. **Channels** -View the program channel list. Click a channel to learn more about it. **Recorded TV** -Burn the recorded TV shows to a disc. **Schedule** -Program the application to record TV shows. **Capture Frame** -Take a screen capture of the current video screen. The captured image will be saved in the "My Documents | My Pictures" folder by default. **Teletext** - Watch teletext (if available). **Settings** -View and edit the settings for the TV module.

Favorite Channel List

Press Ctrl+D to display the Favorite Channel List and select a channel to watch.



To remove a channel, click on its corresponding "Delete" icon (trash can).

To rearrange your list, press the Up/Down arrow buttons on the right of each channel.

- Click on the Up/Down arrow buttons on the left to browse the channel list.

EPG

This section lets you view the channel program lists.

If you are using a digital device, please select to access EPG or network EPG to view the program lists.

While using analog device, the program will take you to the network EPG directly.

Note: This option is only available if you are using an EPG service. The Internet EPG may not be available in all countries and the EPG on some digital services may not be supported.

CHANNELS

This section lets you view the channel list and select a specific channel.



The available channels are listed here. There is a preview window in the bottom left corner of the screen. To watch a channel, click on it, and it will appear in the preview window. You can click the button next to the preview window to play it in Full Screen mode. Press "Esc" to exit Full Screen. Double click a channel will take you back to the TV main screen and the program will start showing.

Options include:

Add to Favorite - Highlight a channel on the list and click on the button to set it as a favorite channel. A checkmark indicates favorite channel.


Delete From Favorite - If you select a favorite channel, click on this button to remove it from the favorite channels list.

From the "Channel Type", choose either to view "All" or only the "Favorite" channels.

Note: When using digital tuner, there will be two more options: "TV" and "Radio".

RECORDED TV

This section displays your recorded TV shows.

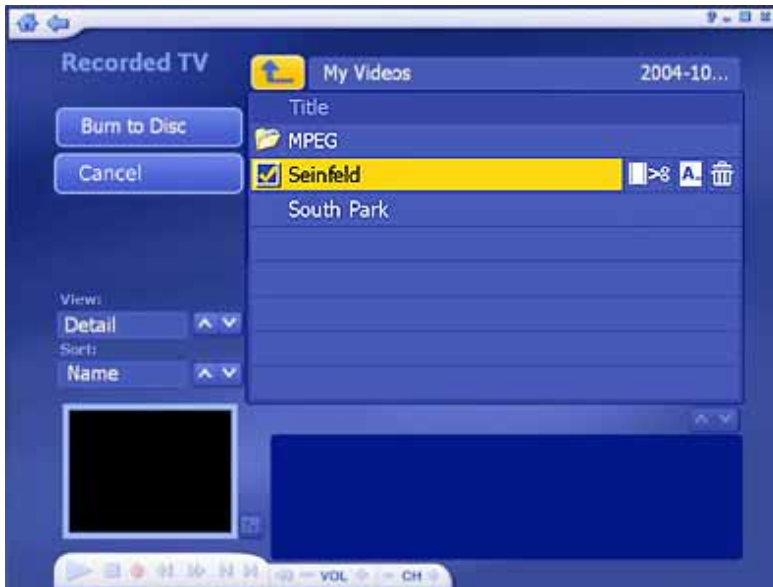

When you play back recorded TV, you can fast forward or rewind using either the controls on your remote control, keyboard, or on the floating toolbar. You can click the button next to the preview window to play it in Full Screen mode. Press "Esc" to exit Full Screen.

From the View section, you can choose either "Detail" or "Thumbnail" view. Both views show you thumbnails of the available photos and folders; "Detail" view includes file/folder names and dates.

From the Sort section, choose to arrange the photos according to name or date.

To trim a video, click the scissors icon to the right of the file.

To rename a video file, click the "A_" icon to access a virtual keyboard.

Click the Delete (trash can) icon to delete a file.

Burn To Disc - Create a DVD or VCD (depending on your settings) containing the selected files. Burn one or more video clips to disc. Browse to the folder that contains the videos, and select the specific files you want.



Check the video files you want to burn to a disc. Click again to deselect (uncheck) a video file.

To trim a video clip, or to choose the frame be used as the chapter button thumbnail, click the scissors icon

to the right of the file name.


Click the disc settings button, to select the proper disc drive, change video format and modify other disc options.

Click the DVD Menu Design button to personalize your DVD disc with a custom title and graphics.


When you're ready to make a disc, click "Burn."

SCHEDULE

This section lets you program the application to record TV shows, then the application will monitor the schedule and record the scheduled programs automatically on the correct day/time.

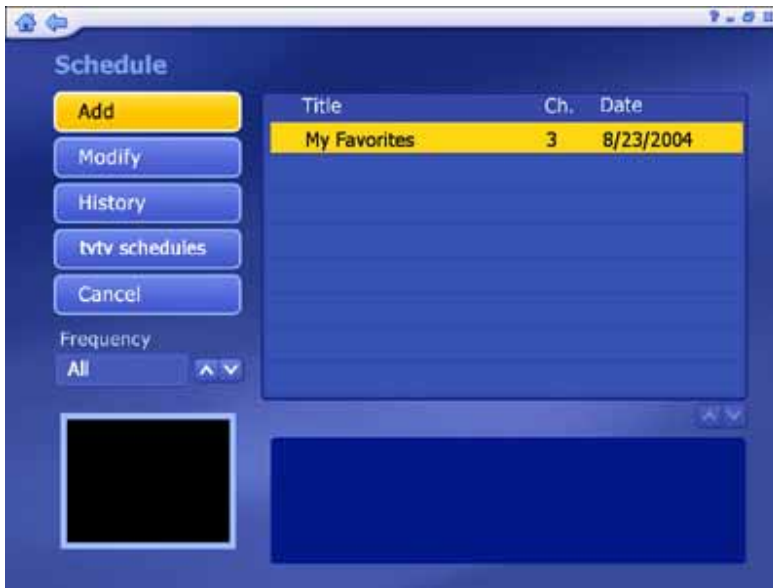


Add - Lets you enter in a new program for recording:

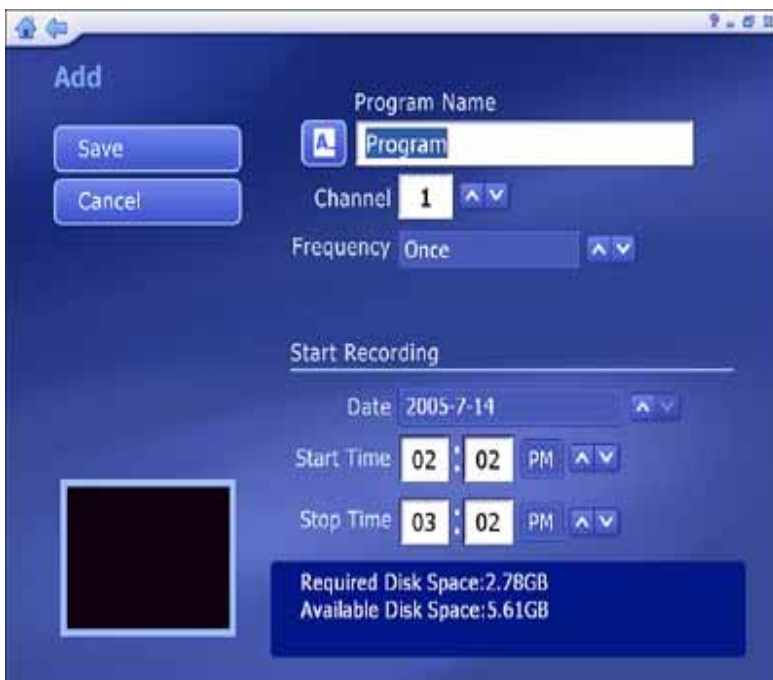

- Enter the name of the program (click "A_" to access a virtual keyboard), then select a channel, recording Frequency (once, daily, or weekly), and set the start/stop recording time.

Modify - Edit the recording details of the selected item. **History** - Display a history of your recorded TV

shows.

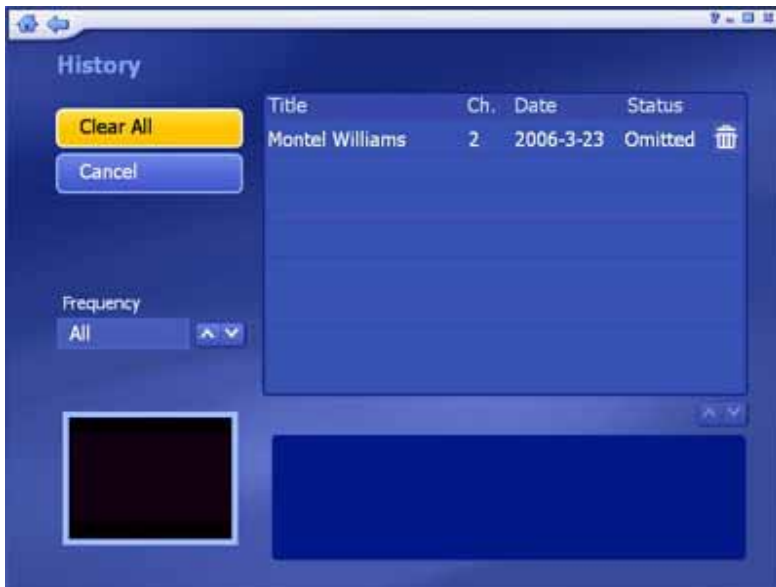

The selected recorded program can be shown in the preview area.

Click the Delete (trash can) icon to delete a file.

- Click the "Clear All" button to discard all the files. The "Frequency" option enables you to filter shows by how often they are recorded (once, daily, and weekly). If conflicting recording sessions are scheduled, you will be presented with a summary of the conflicts and asked to update the schedule.

tv tv schedules -Download program schedules from the tv tv website. (The option is only available when you are using the tv tv EPG.)

TELETEXT

This section lets you watch the teletext. The available teletext channels are listed in the preview area.



Move your mouse to select different teletext channels. The selected titles will be shown on the red, green, yellow and blue area. Click the button with the corresponding color to watch it.


Click the "Live TV" button to go back to the TV screen.

Click the "Teletext Home" button to go back to the teletext main index page.

Note: This function is not available in all countries. (Typically only Europe.)

SETTINGS

View and edit TV settings.

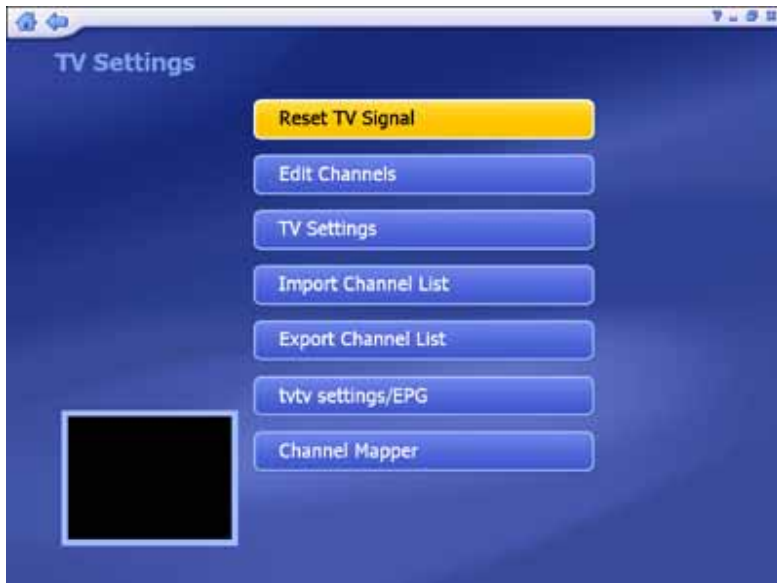

Reset TV Signal

This section lets you view and edit the settings for TV signal. The settings is divided into four steps:

Select your region.

Select video device.

Click "Start" to scan for available channels.


Set up two tuners. After setting up one tuner, if there is another tuner in your PC, you can repeat the steps for the second tuner.

Choose the options you want from the various pull-down lists. The program also provides "Previous" and "Next" buttons to switch between setup pages.

When you're ready, click "Finish".

Edit Channels

View and edit channels for recording from TV.

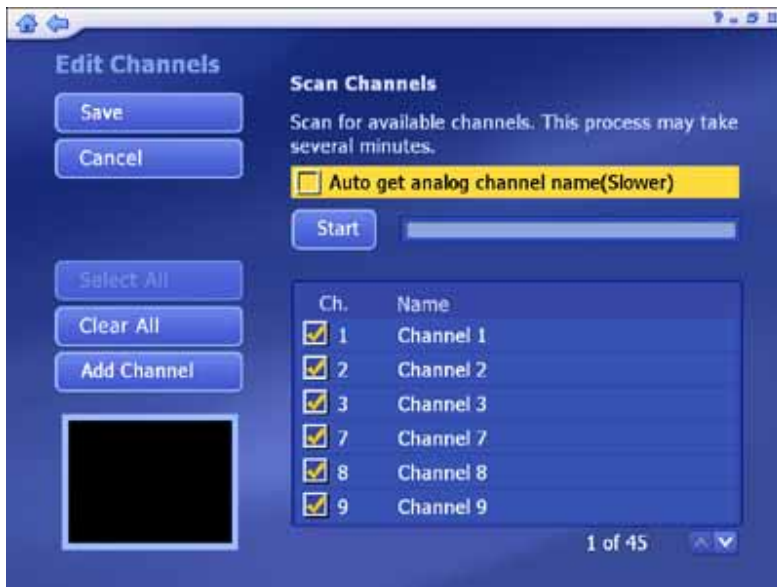

To add channels automatically, simply click "Start." The program will scan through each channel and determine if there is an available signal. Channels will appear in the channel list.

Check "Auto get analog channel name" option to download channel names while channels are being scanned. It would take more time to scan the channels. **Note:** The option is only available when using an analog tuner and when Teletext is supported in your region.


For analog devices, sometimes the automatic scan may not pick up a channel if the signal is poor. To manually add a channel, click "Add Channel." You can enter the channel number, as well as a name for the channel.

To select the channels, you can click on one by one or using the "Select All" option. Or click "Deselect All" button to undo the selection. (Checkmarks indicate channels selected.)

To rename the channel, click the "A_" icon to access a virtual keyboard.

Click the "Delete" (trash can) icon to delete a channel.

Note: If you are using an analog tuner and a digital tuner together, the screen will be slightly different.

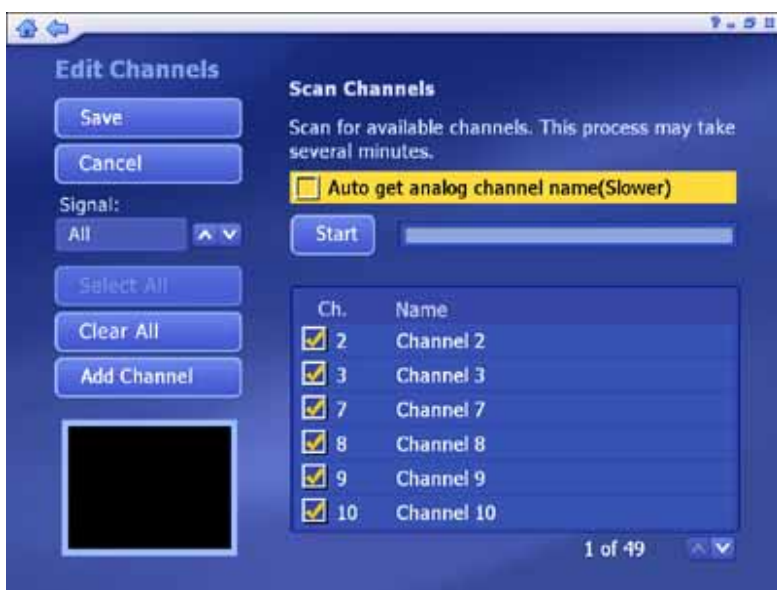

- Click the arrow icon to change the signal.

TV Settings

This section lets you view and edit the TV settings.




Choose the device you want to use. **Note:** The Device Name option is only available when you are using two tuners (Digital and Analog.)

Choose Close Caption/Subtitles, Audio, Video Standard and Digital TV EPG from the list. **Note:** The Video Standard option is only available for analog tuners.

Setting the Time Shifting feature to "On" enables you to pause live TV and watch recorded TV before the recording is complete. This feature requires a high performance PC. **Note:** If your computer CPU runs at 2.0Ghz or higher, this option will be automatically on; otherwise, it will be off.

Import Channel List

This section lets you import the channel list that you saved before.

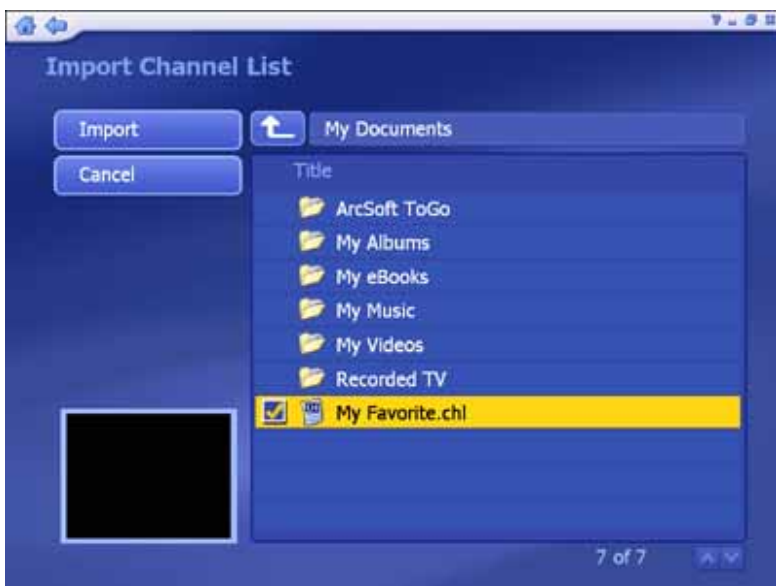

Go to the folder that contains the channel list file you want to import (for example: My Favorite.chl). Click on the "Up One Level" button to go up one directory level.

Check the channel list file (.chl) you want to import.

When you're ready, click "Import."

Export Channel List

This section lets you export the current channel list.



Browse your computer and go to the folder that you want to save the channel list file.

To rename a channel list file, click on the "A_" icon to bring up a virtual keyboard or type in your file name directly.

When you're ready, click "Export."

tv tv settings/EPG -Go to the tv tv or EPG wizard. The wizard will walk you through the settings.

Channel Mapper

This section lets you map your scanned channels with the channels in internet EPG that can be scheduled.



- Select channels you want to map from "Available Channels on tv tv" list and "Scanned Channels" list. The program of the selected channel will be display in the preview area.
- Click "Map" after choosing. Or click "Unmap" to discard the mapped channels.

Note: The function is just available in Germany, Austria, Switzerland, UK, France, Spain, Italy and Netherlands.

Chapter 8 : PIP (Picture-In-Picture) / PBP (Picture-By-Picture) Mode in TV

Function

Dual tuners provide the function that watching 2 TV programs at the same time. You can choose PIP Mode or PBP Mode.

PIP (Picture-In-Picture) Mode



PIP Mode will show a bigger main TV screen and a smaller TV screen at the same time. You can control the TV screen with a green frame by floating toolbar. Double click the smaller main TV will change their position with each other. Double click the bigger one will make it full screen.

Enable PIP (Picture-In-Picture) Mode

In the floating tool bar you will find the icon like the pic below.



Click the icon will enable you to choose Single / PIP.




Click PIP to enable PIP Mode.

PIP (Picture-In-Picture) Mode in full screen

You can adjust the position and size for smaller TV window.

Click the icon on the floating tool bar as the pic below to adjust the smaller TV window size.

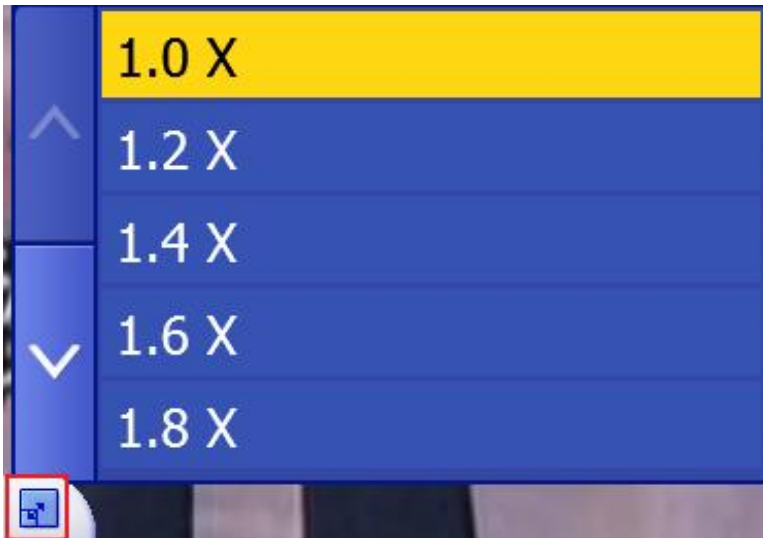

Click the icon on the floating tool bar as the pic below to adjust the smaller TV window position.



PBP (Picture-By-Picture) Mode


PBP Mode will show 2 TV screens side by side. You can control the TV screen with a green frame by floating toolbar. Double click the left TV screen will change their position with each other. Double click the right one will be back to PIP Window Mode. **In order to make a good PBP using experience, a wide screen is recommended. PBP Mode can only be activated in full screen, and only be supported these resolutions below.**

1280x720 , 1280x768 , 1280x800 , 1360x768 , 1440x900 , 1600x900 , 1600x1024 , 1680x1050 , 1920x1080 , 1920x1200 , 2560x1200 .



Enable PBP (Picture-By-Picture) Mode

At the Full screen in the floating tool bar , you will find the icon like the pic below, click PBP to enable it.

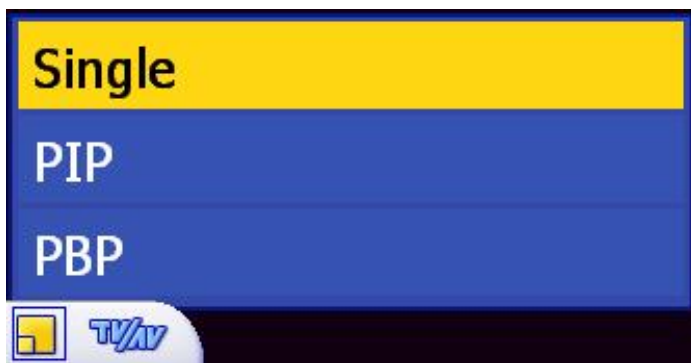

MSI DIGIVOX Duo

English

Package Contents


- MSI DIGIVOX Duo
- Software Pack CD
- Users manual
- Quick install guide
- Remote controller
- DVB-T antenna

System Requirements

- Pentium-IV 2.0 GHz or higher recommended
- 512MB RAM of system memory or above (recommended)
- One available USB2.0 port
- Graphics Card (Must support Microsoft DirectX 9.0 or above) (If your OS is Microsoft MCE 2005, you have to use Media Center Edition 2005 Certified graphics card.)
- Sound Card (AC97 compatible sound card)
- 2GB Free HD Space
- CD-ROM or DVD-ROM Drive (For software installation)
- Microsoft DirectX 9.0c
- Microsoft Windows® XP SP2/MCE/Vista (when using MCE OS an extra 3rd party DVD decoder must be installed)

Hardware Installation

- Connect the antenna into the TV INPUT connector.
- Put the MSI DIGIVOX Duo into the USB 2.0 port of your Notebook or PC

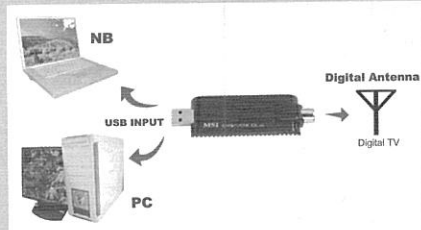

MSI DIGIVOX Duo Drivers Setup

- Once you finish the hardware installation, restart your system. "Windows Found New Hardware Wizard" will pop up. Please click "Cancel" and run the setup included in the CD.
- Select "Driver Install" to install drivers and utilities.



- The driver utilities will help you to install all the drivers. Click "Start" to continue installing drivers. Please wait while installation in process.

MSI DIGIVOX Duo

German

Packungsinhalt


- MSI DIGIVOX Duo
- Software Pack CD
- Benutzerhandbuch
- Kurzanleitung
- Fernbedienung
- DVB-T Antenne

Systemanforderungen

- Pentium-IV 2.0 GHz oder höher.
- 512MB RAM Systemspeicher oder mehr.
- Ein freier USB2.0-Anschluss
- Grafikkarte (muss Microsoft Direct 9.0 oder höher unterstützen) (Als uw OS Microsoft MCE 2005 is, moet u Gediplomeerde de grafiekaart van de Uitgave 2005 van het Centrum van Media gebruiken.)
- Soundkarte (kompatibel mit AC97).
- 2GB freier Festplattenspeicher.
- CD-ROM or DVD-ROM-Laufwerk (für die Softwareinstallation)
- Microsoft DirectX 9.0c
- Kompatibel mit Microsoft Windows® XP SP2/MCE/Vista. (Beim Betriebssystem MCE müssen Sie einen DVD-Decoder eines anderen Herstellers installieren)


Hardwareinstallation

- Schließen Sie die Antenne an den TV-IN-Anschluss an.
- Schließen Sie den MSI DIGIVOX Duo an den USB2.0-Anschluss des Computers an.

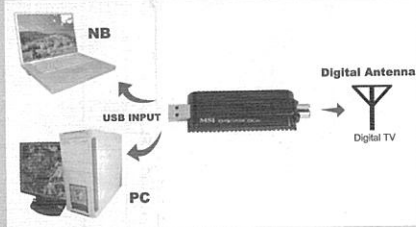

MSI DIGIVOX Duo-Treiberinstallation

- Nachdem Sie die Hardware installiert haben, starten Sie das System neu. Auf dem Bildschirm erscheint die Meldung "Assistent zum Suchen neuer Hardware". Klicken Sie auf "Abbrechen" und starten Sie die Installationsdatei, die sich auf der CD befindet.
- Wählen Sie die Option "Driver Install", um alle Treiber und Hilfsprogramme zu installieren.



- The driver utilities will help you to install all the drivers. Click "Start" to continue installing drivers. Please wait while installation in process.

MSI DIGIVOX Duo

French

Contenu de l'emballage


- MSI DIGIVOX Duo
- CD du Pack de logiciels
- Manuel d'utilisateur
- Guide rapide
- Télécommande
- Antenne portable

Configuration requise

- Pentium-IV 2.0 GHz ou supérieur.
- RAM de 512 Mo de mémoire système ou plus.
- Un port USB2.0 libre
- Carte graphique (Doit prendre en charge Microsoft Direct 9.0 ou supérieur) (Si votre OS est l'ECM 2005 de Microsoft, vous devez employer la carte diplômée de graphiques de l'édition 2005 centraux de médias.)
- Carte son (Carte son compatible AC97).
- 2Go d'espace libre sur le disque dur.
- Lecteur CD-ROM or DVD-ROM (pour l'installation du logiciel)
- Microsoft DirectX 9.0c
- Compatible avec Microsoft Windows® XP SP2/MCE/Vista. (Quand vous utilisez MCE OS un décodeur de DVD tiers supplémentaire doit être installé)

Installation matérielle

- Connectez l'antenne sur le connecteur TV INPUT (Entrée TV).
- Branchez MSI DIGIVOX Duo dans le port USB 2.0 de votre système.

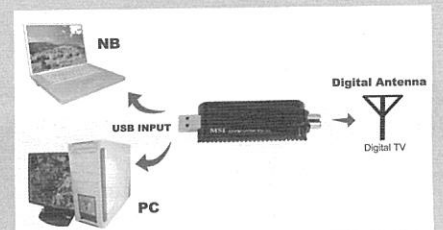

Installation des pilotes de MSI DIGIVOX Duo

- Quand vous avez terminé l'installation matérielle, redémarrez votre système. L'assistant de nouveau matériel détecté de Windows® s'affichera. Cliquez sur "Annuler" et exécutez le programme d'installation inclus dans le CD.
- Sélectionnez "Installation du pilote" pour installer les pilotes et les utilitaires.



- Les utilitaires de pilotes vous aideront à installer tous les pilotes. Cliquez sur "Démarrer" pour continuer à installer les pilotes. Patientez pendant l'installation.

MSI DIGIVOX Duo

Spanish

Contenidos del paquete


- MSI DIGIVOX Duo
- CD paquete de software
- Manual de usuario
- Guía rápida
- Mando a distancia
- Antena portátil

Requisitos del sistema

- Pentium-IV 2.0 GHz o superior.
- 512MB RAM de memoria del sistema o más.
- Un puerto USB2.0 libre
- Tarjeta gráfica (debe soportar Microsoft Direct 9.0 ó superior)
- Tarjeta de sonido (tarjeta de sonido compatible con AC97).
- 2GB de espacio libre en el disco duro.
- Unidad de CD-ROM or DVD-ROM (para la instalación del software)
- Microsoft DirectX 9.0c
- Compatible con Microsoft Windows®XP SP2/MCE/Vista. (Cuando utilice el MCE OS necesitará instalar un decodificador de DVD de una 3ª parte)


Instalación del hardware

- Conecte la antena en el conector TV INPUT (ENTRADA TV).
- Enchufe el MSI DIGIVOX Duo en el puerto USB 2.0 de su sistema.

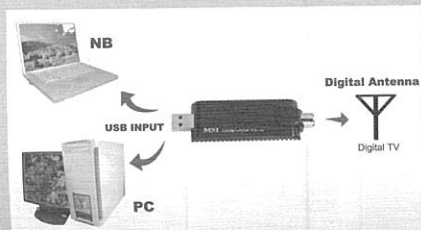

Instalación de controladores MSI DIGIVOX Duo

- Una vez finalizada la instalación del hardware, reinicie su sistema. Aparecerá el "Asistente para nuevo hardware de Windows". Haga clic en "Cancelar" y ejecute la instalación incluida en el CD.
- Seleccione "Driver Install" para instalar los controladores y utilidades.



- Las utilidades de controlador le ayudarán a instalar todos los controladores. Haga clic en "Inicio" para continuar instalando los controladores. Espere mientras la instalación está en proceso.

MSI DIGIVOX Duo

Italian

Contenuto della confezione


- MSI DIGIVOX Duo
- CD contenente il software
- Manuale di utente
- Guida rapida
- Telecomando
- Antenna portatile

Requisiti di sistema

- Pentium IV 2.0 GHz o superiore.
- 512 MB di RAM di sistema o quantità maggiore.
- Una porta USB 2.0 libera
- Scheda grafica (con supporto per Microsoft Direct 9.0c successivo)
- Scheda audio (compatibile AC97).
- 2 GB di spazio libero su disco rigido.
- Lettore CD-ROM or DVD-ROM (per l'installazione del software)
- Microsoft DirectX 9.0c
- Compatibile con Microsoft Windows®XP SP2/MCE/Vista. (Se si utilizza MCE OS, è necessario installare un decoder DVD supplementare fornito da terzi.)


Installazione hardware

- Collegare l'antenna al connettore TV INPUT
- Collegare il MSI DIGIVOX Duo alla porta USB 2.0 del computer.

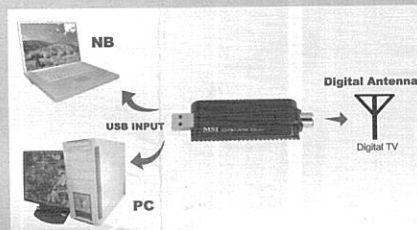

Installazione dei driver di MSI DIGIVOX Duo

- Terminata l'installazione hardware, riavviare il computer. viene visualizzata la finestra di installazione del nuovo hardware di Windows. Fare clic su "Annulla" e avviare il programma del CD.
- Selezionare "Driver Install" (installa driver) per installare driver e utilità.



- Le utilità dei driver consentono di installare tutti i driver. Fare clic su "Start" per continuare l'installazione. Attendere il completamento della procedura.

MSI DIGIVOX Duo

Russian

Содержимое упаковки


- MSI DIGIVOX Duo
- CD-Диск с программным обеспечением
- руководство пользователя
- Руководство по быстрой установке
- Пульт дистанционного управления
- Портативная антенна

Системные требования

- Pentium-IV 2.0 ГГц или выше.
- 512Мб RAM (Оперативная память) и более
- Один свободный USB2.0 порт
- Видео-карта (Должна поддерживать Microsoft Direct 9.0 и выше)
- Звуковая карта (AC97-совместимая).
- 2Гб свободного места на жестком диске.
- CD-ROM or DVD-ROM привод (Для установки ПО)
- Microsoft DirectX 9.0c
- Совместима с Microsoft Windows®XP SP2/MCE/Vista. (При использовании ОС MCE должен быть установлен DVD декодер другой фирмы)


Установка оборудования

- Подключите антенну к разъему TV INPUT.
- Подключите MSI DIGIVOX Duo к USB 2.0 порту вашего компьютера.

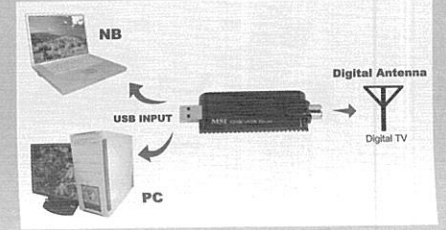

Установка драйверов MSI DIGIVOX Duo

- Как только вы закончите установку оборудования, перезагрузите ваш компьютер. При загрузке появится окно "Найдено новое оборудование". Нажмите "Отмена" и запустите программу установки (setup) с CD-диска.
- Выберите опцию "Driver Install" («Установить драйвер»)



- Утилиты драйвера помогут вам установить все драйверы. Нажмите «Старт», чтобы продолжить установку драйверов. Подождите, пока не закончится процесс установки.

MSI DIGIVOX Duo

Croatian

Sadržaj paketa

- MSI DIGIVOX Duo
- CD sa softverom
- Priručnik
- Kratka uputa
- Remote controller
- Portabl antenna


Sistemske zahtjevi

- Pentium-IV 20 GHz ili jači.
- Najmanje 512 MB RAM sistemske memorije.
- Jedan slobodan USB2.0 konektor
- Grafička kartica (mora podržavati Microsoft Direct 9.0 ili noviju inačicu)
- Zvučna kartica (AC97 kompatibilna zvučna kartica)
- 2GB slobodnog prostora na hard disku.
- CD-ROM or DVD-ROM pogon (za instalaciju softvera)
- Microsoft DirectX 9.0c
- Kompatibilan sa Microsoft Windows® XP SP2/MCE/Vista.

(Kada se koristi MCE OS, mora se instalirati dodatni DVD recorder)

Instalacija hardvera

- Prikjučite antenu u TV INPUT konektor
- Put the MSI DIGIVOX Duo into the USB 2.0 port of your Notebook or PC

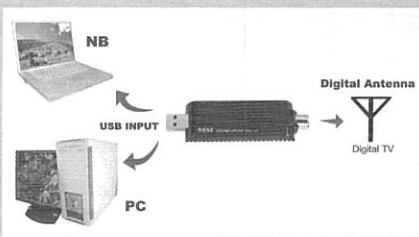

MSI DIGIVOX Duo postavka

- Jednom kada završite instalaciju hardvera, restartujte Vaš sistem. Pojavit će se izbornik "Windows Found New Hardware Wizard". Molimo odaberite "Cancel" i pokrenite podešavanje, "Run the setup" koji se nalazi na CD-u.
- Kliknite na gumb "Driver Install" kako bi ste instalirali drivere i uslužne programe (utilities).



- "Driver utilities" će Vam pomoći da instalirate sve upravljačke programe. Kliknite na "Start" da nastavite instaliranje upravljačkih programa. Pričekajte dok je instalacija u toku.

MSI DIGIVOX Duo

Czech

Obsah balení

- MSI DIGIVOX Duo
- CD s balíčkem programového vybavení
- Příručka uživatele
- Rychlý průvodce
- Remote controller
- Přenosná anténa


Systémové požadavky

- Pentium-IV 20 GHz nebo vyšší.
- 512 MB RAM nebo více paměti systémů.
- Jeden volný USB2.0 port.
- Grafická karta (Musí podporovat Microsoft Direct 9.0 nebo vyšší).
- Zvuková karta (kompatibilní s AC97).
- 2 GB volného prostoru na harddisku.
- Jednotka CD-ROM or DVD-ROM (pro instalaci programového vybavení)
- Microsoft DirectX 9.0c
- Kompatibilní s Microsoft Windows®XP SP2/MCE/Vista.

(Používáte-li MCE OS, je třeba instalovat další DVD decoder 3. strany)

Instalace technického vybavení

- Zapojte anténu do vstupního TV konektoru.
- Zapněte MSI DIGIVOX Duo do vašeho systémového USB 2.0 portu.

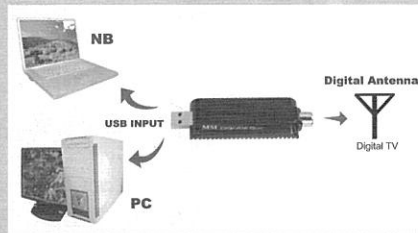

Nastavení ovládačů MSI DIGIVOX Duo

- Jakmile dokončíte instalaci technického vybavení, restartujte váš systém. Objeví se "Windows Found New Hardware Wizard". Klikněte "Cancel" a spusťte instalaci obsaženou na CD.
- Pro instalaci ovládačů a pomůcek vyberte "Driver Install"



- Pomůcky ovládače vám poslouží k instalaci všech ovládačů. Pro pokračování instalace ovládačů klikněte na "Start". Počkejte do ukončení instalace.

MSI DIGIVOX Duo

Danish

Packingsindhold

- MSI DIGIVOX Duo
- Software Pack CD
- Antennenadapterkabel
- Kurzanleitung
- Fjernbetjening
- Tragbare Antenne


Systemanforderungen

- Pentium-IV 20 GHz oder höher.
- 512 MB RAM Systemspeicher oder mehr.
- Ein freier USB2.0-Anschluss
- Grafikkarte (muss Microsoft Direct 9.0 oder höher unterstützen)
- Soundkarte (kompatibel mit AC97).
- 2 GB volnøho prostoru na harddisku.
- Jednotka CD-ROM or DVD-ROM (pro instalaci programového vybavení)
- Microsoft DirectX 9.0c
- Microsoft Windows®XP SP2/MCE/Vista kompatibel.

(Hvis der bruges MCE OS, skal der installeres en ekstra 3.-parts dvd-decoder)

Installation af Hardware

- Tilslut antennen til TV INPUT-bøsningen.
- Indsæt MSI DIGIVOX Duo i systemets USB 2.0 port.

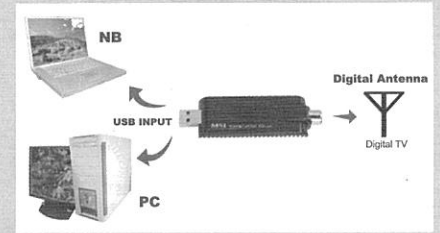

Installation af MSI DIGIVOX Duo

- Efter hardwaren er færdiginstalleret, skal systemet genstartes. Herefter vil "Windows har fundet ny hardware guiden" komme til syne. Tryk "Afbrød" og gå i stedet for installationen fra den medfølgende CD.
- Vælg "Driver Install" for at installere drivere og serviceprogram.



- Serviceprogrammet vil give hjælp til installation af alle drivere. Tryk "Start" for at fortsætte installationen af drivere. Vent venligst mens installationen er i gang.

MSI DIGIVOX Duo

Dutch

Pakketinhoud

- MSI DIGIVOX Duo
- Softwarepakket CD
- Gebruikers handboek
- Beknopte handleiding
- Afstandsbediening
- Draagbare antenne


Systeemvereisten inhoud

- Pentium-IV 20 GHz of hoger
- 512 MB RAM aan systeemgeheugen of hoger.
- Een vrije USB2.0-poort
- Grafische kaart (moet Microsoft Direct 9.0 of hoger ondersteunen)
- Geluidskaart (AC97 compatibele geluidskaart).
- 2GB aan vrije HD-ruimte.
- CD-ROM or DVD-ROM-station (voor software-installatie)
- Microsoft DirectX 9.0c
- Microsoft Windows®XP SP2/MCE/Vista compatibel.

(Wanneer u MCE OS gebruikt moet een extra DVD decoderder van derden worden geïnstalleerd)


Hardware-installatie

- Sluit de antenne aan op de TV INPUT connector.
- Steek de MSI DIGIVOX Duo in de USB 2.0-poort van uw systeem.

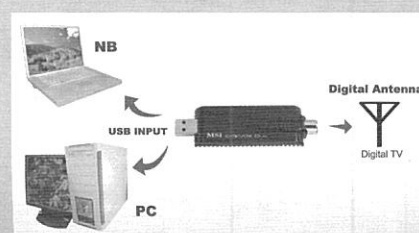

Besturingsprogramma-installatie

- Nadat u de hardware-installatie heeft voltooid, start u uw systeem opnieuw op. "Windows heeft een nieuwe Hardware Wizard gevonden" wordt weergegeven. Klik op "Annuleren" en voer de installatie uit die op de CD staat.
- Selecteer "Stuurprogramma-installatie" om de drivers en hulpprogramma's te installeren.



- Met de hulpprogramma's van de driver kunt u alle drivers installeren. Klik op "Start" om verder te gaan met het installeren van de drivers. Tijdens het installatieproces moet u even wachten.

MSI DIGIVOX Duo

Finish

Pakkauksen sisältö

- MSI DIGIVOX Duo
- Ohjelmisto-CD
- Käyttäjän käsikirja
- Pikaopas
- Kaukosäädin
- Kannettava antenni


Järjestelmävaatimukset

- Pentium-IV 20 GHz tai suurempi.
- Järjestelmämämuisti 512 MB RAM tai suurempi.
- Yksi vapaa USB2.0-portti
- Grafiikkakortti (joka tukee Microsoft Direct 9.0 tai suurempaa)
- Äänikortti (AC97 -yhteensopiva äänikortti).
- 2GB vapaata kovatallustaa.
- CD-ROM or DVD-ROM-asema (ohjelmiston asennukseen)
- Microsoft DirectX 9.0c
- Yhteensopiva Microsoft Windows®XP SP2/MCE/Vista -käyttöjärjestelmän kanssa.

(Käytettäessä MCE-käyttöjärjestelmää, ylimääräinen kolmannen osapuolen DVD-dekooderi on asennettava)


Laitteen asennus

- Liitä antenni TV INPUT-liittimeen.
- Liitä MSI DIGIVOX Duo järjestelmäsi USB 2.0-porttiin.

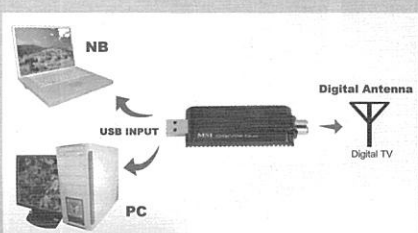

MSI DIGIVOX Duo ajurien asentaminen

- Asennettuaasi laitteen, käynnistä tietokoneesi uudelleen. "Windows löysi uuden laitteen"-apuohjelma tulee esiin. Napsauta ensin "Peruuta" ja suorita sitten asennusohjelma mukana tulleella CD-levyllä.
- Valitse "Ajurin asentaminen" asentaaksesi ajurin.



- Ajurin apuohjelmat auttavat sinua asentamaan kaikki ajurit. Napsauta "Käynnistä" jatkaaksesi ajureiden asentamista. Odota kunnes asennus on suoritettu.

MSI DIGIVOX Duo

Greek

Περιεχόμενα Πακέτου

- MSI DIGIVOX Duo
- Λογισμικό σε CD
- εγχειρίδιο χρήστη
- Σύντομος οδηγός χρήσης
- Remote controller
- Φορητή κεραία


Απαιτήσεις Συστήματος

- Μικροεπεξεργαστής Pentium-IV 20 GHz και πάνω.
- Μνήμη συστήματος 512 MB RAM ή ανώτερη.
- Μία ελεύθερη θύρα USB2.0.
- Κάρτα γραφικών (Γίνεται να υποστηρίξει το πακέτο Microsoft Direct 9.0 ή ανώτερες εκδόσεις)
- Κάρτα ήχου (Κάρτα ήχου συμβατή με AC97).
- Ελεύθερος χώρος 2GB στον σκληρό δίσκο.
- CD-ROM or DVD-ROM Drive (Για την εγκατάσταση του λογισμικού)
- Microsoft DirectX 9.0c
- Συμβατό με Microsoft Windows®XP SP2/MCE/Vista.

(Όταν χρησιμοποιείτε MCE OS, θα πρέπει να εγκαταστήσετε έναν αποκωδικοποιητή DVD ανεξάρτητου κατασκευαστή)


Εγκατάσταση

- Συνδέστε την κεραία στον ρευματοδότη TV INPUT.
- Συνδέστε το Plug MSI DIGIVOX Duo στη θύρα USB 2.0 του συστήματός σας.

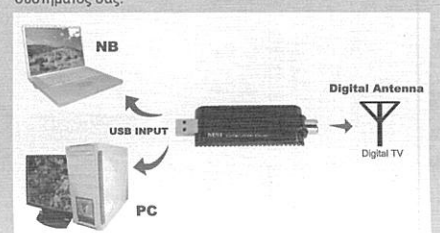

Ρύθμιση των MSI DIGIVOX Duo

- Μόλις τελειώσετε με την εγκατάσταση του hardware, κάντε επανεκκίνηση του συστήματός σας. Θα εμφανιστεί το μήνυμα: "Windows Found New Hardware Wizard". Κάντε κλικ στο "Cancel" και πηγαίστε το setup που περιέχεται στο CD.
- Επιλέξτε "Driver Install" για να εγκαταστήσετε drivere και utilities.



- Οι utilities των drivers θα σας βοηθήσουν να εγκαταστήσετε όλους τους drivers. Παρακαλείστε να περιμένετε σε όλη τη διάρκεια της διαδικασίας της εγκατάστασης.